

Presto FF-C18


150 x 4.6 mm

Application

Polyethylene glycols (PEG)

ポリエチレングリコール

- $H(OCH_2CH_2)_nOH$
- 1 polyethylene glycol (ca. 2,000 Da)
 - 2 polyethylene glycol (ca. 8,500 Da)
 - 3 polyethylene glycol (ca. 12,000 Da)
 - 4 polyethylene glycol (ca. 20,000 Da)

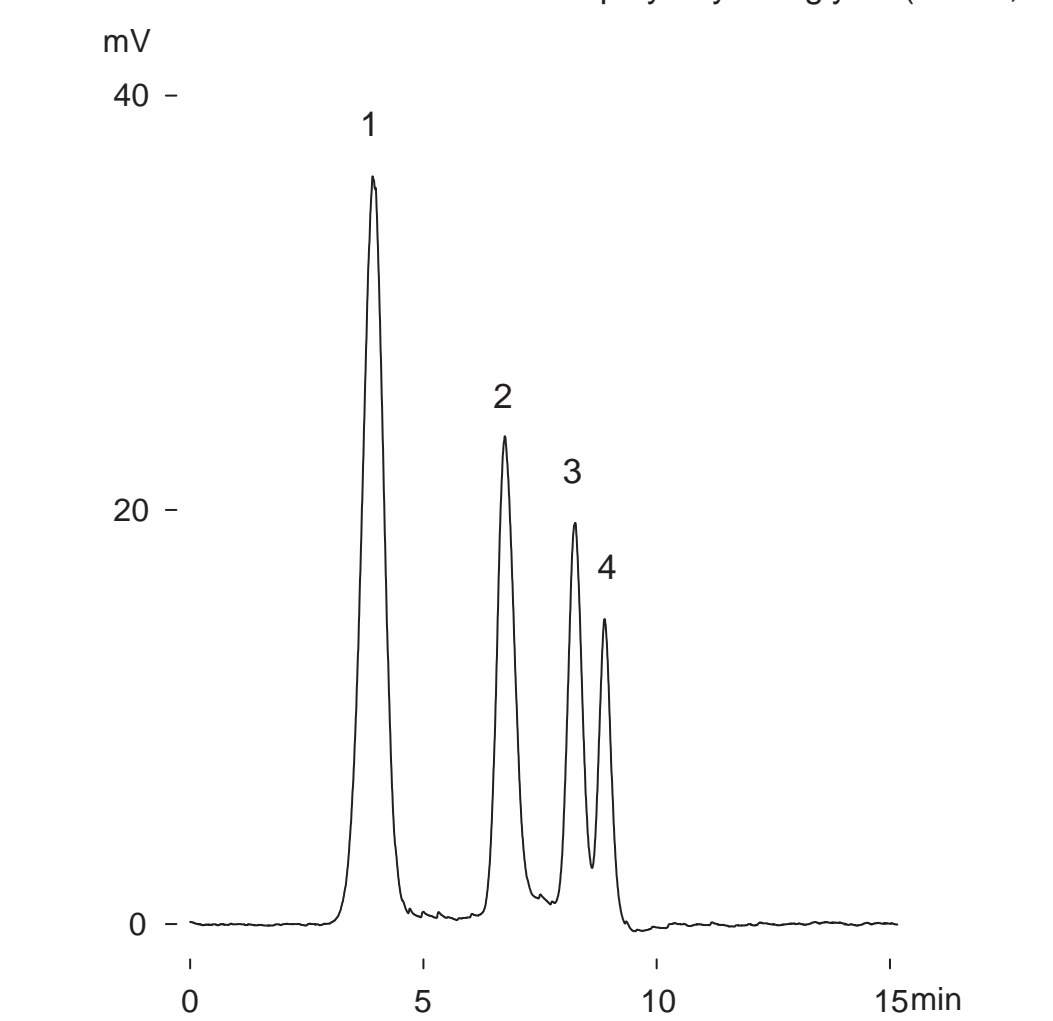

Presto FF-C18, 150 x 4.6mm

A: water

B: acetonitrile

30-40 %B (0-2min), 40-60 %B (2-15min)

0.4 mL/min (24MPa), 37 deg.C

ELSD (spray chamber 50deg.C, drift tube 100deg.C), 3 uL (1.5-6ug)