

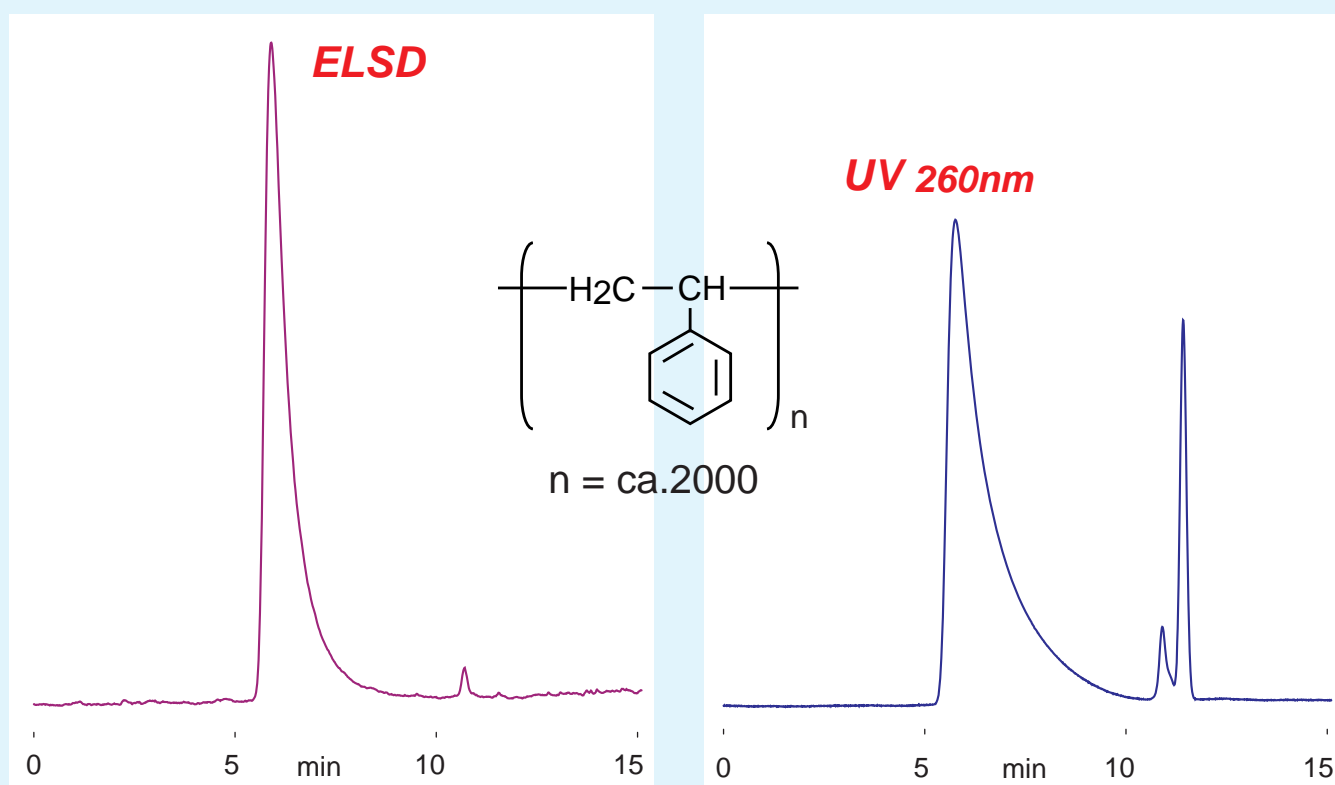
Intrada SEC

250 x 4.6 mm

Application

SEC: Polystyrene

ポリスチレンのSEC分離

**Styrene, Polymer****Intrada SEC****MW 210 kDa**

Intrada SEC, 250 x 4.6mm
THF (tetrahydrofuran)
0.3mL/min (3MPa), 37 °C
5 μL (2mg/mL, THF)